

# WA classic fan



## Main features:







- ABS plastic
- slide bearings
- IPX4
- maximum operating temperature 40°C
- 2 years warranty
- non-return valve (ZZ) usage ability

**2**

**2 YEARS  
WARRANTY**

Ø100		Ø120		Ø150	
<b>37</b> dB	<b>90</b> m <sup>3</sup> /h	<b>41</b> dB	<b>135</b> m <sup>3</sup> /h	<b>43</b> dB	<b>180</b> m <sup>3</sup> /h
<b>14</b> W	<b>30</b> Pa	<b>16</b> W	<b>60</b> Pa	<b>20</b> W	<b>42</b> Pa

## Equipment


	Terminal block	∨
	Pull switch	∨
	Pull switch with cable and plug 230V	∨
	Timer (switch off delay)	∨
	Humidity sensor + timer	∨
	Two-speed	∨



		INDEX					
∅100	WA100	●					
	WA100W		●				
	WA100WP		●	●			
	WA100T				●		
	WA100H				●	●	
	WA100DW	●	●				●
	WA100DWP		●	●			●
∅120	WA120	●					
	WA120W		●				
	WA120WP		●	●			
	WA120T				●		
	WA120H				●	●	
∅150	WA150	●					
	WA150W		●				
	WA150WP		●	●			
	WA150T				●		
	WA150H				●	●	

		m <sup>3</sup> /h	W	Pa	dB(A)
∅100	<b>I SPEED</b> WA100DW, WA100DWP	64	5	19	33
	<b>II SPEED</b> WA100DW, WA100DWP	85	12	25	37

## Dimensions

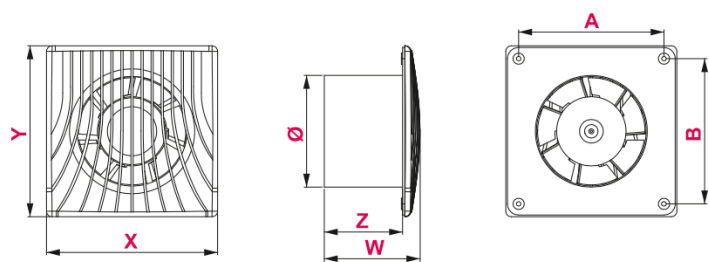

	∅	A	B	X	Y	W	Z
∅100	100	130	130	154	154	87	77
∅120	120	130	130	154	154	87	77
∅150	150	161	161	188	188	97	77