

Turbo korpus wentylatora



TURBO

Main features:

- high air exchange capacity
- ABS plastic
- ball bearings
- IPX4
- maximum operating temperature 40°C
- wall and ceiling installation allowed*
- 5 years warranty
- non-return valve (ZZ) usage ability



TURBO



30 000
h

5

5 YEARS
WARRANTY

Ø100

36
dB

110
m³/h

Ø125

42
dB

215
m³/h

13
W

40
Pa

18
W

62
Pa



BODY

+










PANEL



FAN


Equipment

	Easy Clip	▼
	Terminal block	▼
	Pull switch	▼
	Timer (switch off delay)	▼
	Humidity sensor + timer	▼
	Microwave motion sensor + timer	▼
	Time and speed governor	▼



	INDEX					
ø100	KWT100	●				
	KWT100W		●			
	KWT100T			●		
	KWT100H			●	●	
	KWT100CTR			●		●
	NOWOŚĆ KWT100M			●		●
ø125	KWT125	●				
	KWT125W		●			
	KWT125T			●		
	KWT125H			●	●	
	KWT125CTR			●		●
	NOWOŚĆ KWT125M			●		●

Dimensions

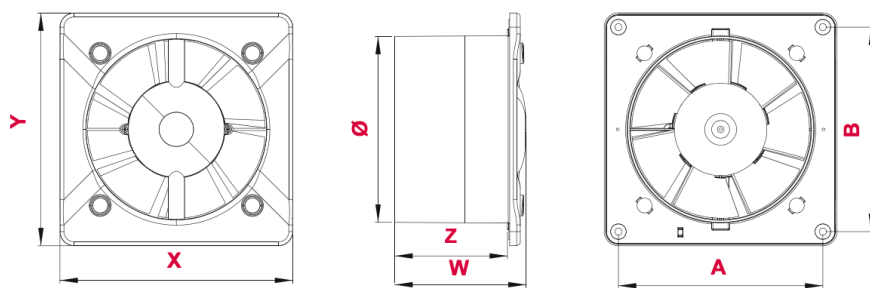

	ø	A	B	X	Y	W	Z
ø100	100	109	109	128	128	88	77
ø125	125	137	137	156	156	88	77