



0 ... bar
0 ... °C

Acc.PED (97/23/EC) §3.3




1




$\leq 50\%$ glycol

> 227 mm

> 227 mm

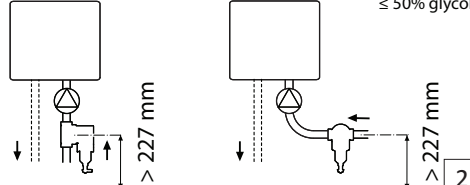


2





Rp 1 1/4
Rp 1 1/2
Rp 2


> 225 mm




3





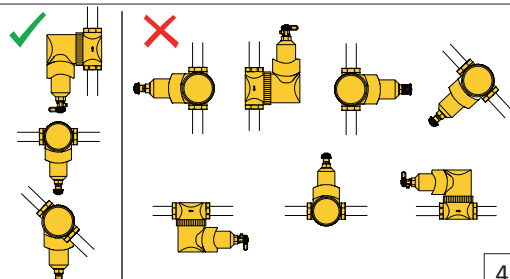


4




max. 40 Nm

click

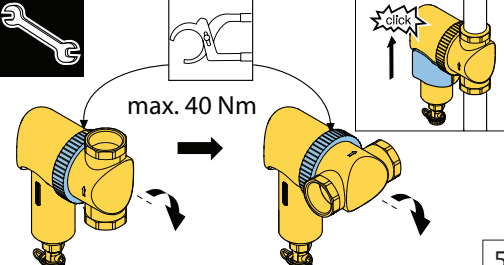


5





$P_{max} = 1,5 \times \dots \text{bar}$

click

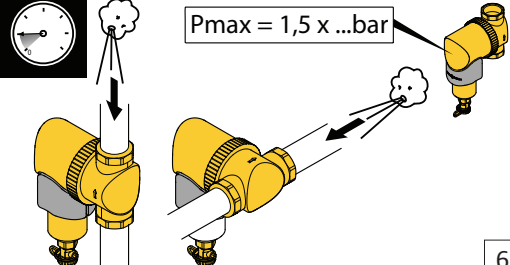

6








1

2


3








click



7

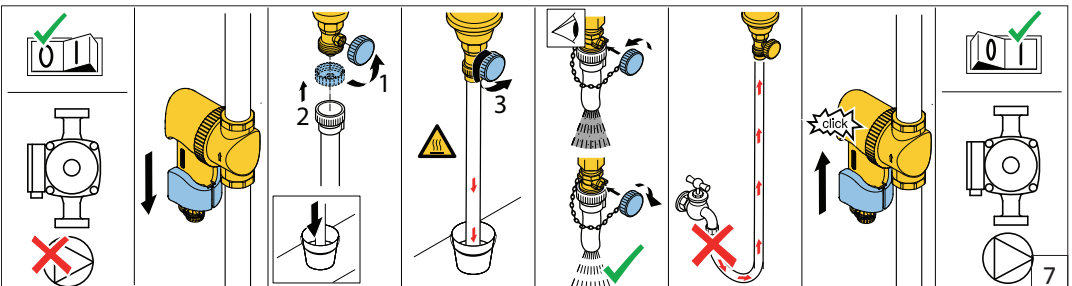


SPIROTECH
FOR BEST PERFORMANCE

SPIROTRAP® MBL

location
installatonsort
place d'installation
installatieplaats

installation date
installatiedatum
date d'installation
installatiedatum

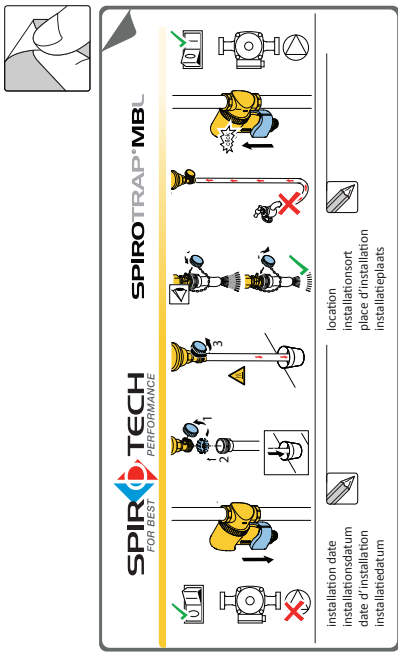

Dirt Separator
Schlammabscheider
Vuilafscheider
UE125WJ UE150WJ UE200WJ

Séparateur de boues
Separador de lodos
Separatore di impurità